

## Support Endless Possibilities for Improved Contactless Authentication

The WAVE ID® Plus Surface Mount reader combines proximity and contactless technologies into one reader. Some features of this reader include:

- Capable of reading both 125 kHz proximity cards and 13.56 MHz contactless cards
- Compatible with Windows 10 (32 & 64 bit), 11 (64 bit), MacOS Monterey and above, Linux
- Standard four card configurations (two are pre-set; two are user-definable)
- Ideal for enrollment into third-party software or for single sign-on integrators
- User-adjustable beeper volume can be set to high, low or off as appropriate for the work environment
- The Wave ID Plus Surface Mount has an optional IP67-compliant kit that when implemented, allows the reader to achieve an IP67 rating
- Patented 13.56 MHz auto-tuning ensures optimal power transfer to avoid interference
- WAVE ID Plus Surface Mount reader supports the power of HID employee badge and Student ID in Apple Wallet

### All-In-One Flexible Design

The WAVE ID Plus Surface Mount is a dual frequency programmable reader that reads both proximity and contactless smart cards. Users can leverage their 125 kHz or 13.56 MHz employee credentials for secure authentication and identification throughout the workplace. The plug-and-play reader allows users to quickly configure the output to meet their unique needs. With its dual-frequency multi-technology design, the WAVE ID Plus Surface Mount is highly configurable and capable of simultaneously handling up to four card technologies.



### Easy Interface and Protocol

EtherNet/IP equipped models interface seamlessly with AllenBradley RS Logix 5000 (or higher) software. Connecting directly into the USB port, the reader emulates keystrokes of the USB model card data on the login screen. The serial models can connect to a RS232 port\*. Its user-friendly functionality requires no software for seamless integration with common operating systems and applications. The reader integrates into your software or hardware product through the use of the rf IDEAS Software Developer's Kit (SDK).

### Versatile Mounting & Applications

The Surface Mount is specifically designed for applications such as kiosks, time & attendance, point of sale, hoteling, meeting attendance and others that require special mounting versatility. Customizable to work with any card solution for any size corporation, this reader allows for unobtrusive placement in government, healthcare, manufacturing/industrial and enterprise environments.


Trust begins here.™




**Common Applications**


The introduction of the card reader which accommodates four configurations pave the way to an unlimited number of applications. Here are some of the most common applications in key industries.

**AUTHENTICATION SOLUTIONS FOR KEY MARKETS**

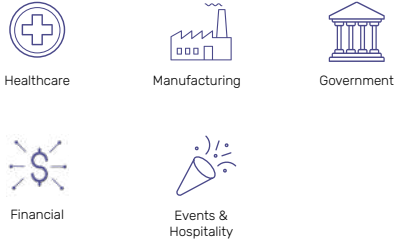

**COVERING THE FULL RANGE OF APPLICATIONS**

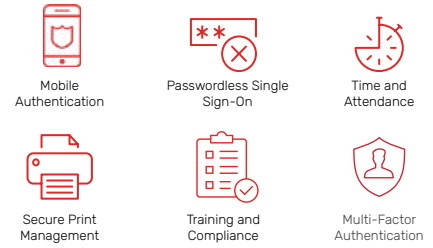

Reader Models	805	800	80M
Secure Access Module	N/A	HID OMNIKEY	MIFARE
Secure Technology Type	N/A	HID SEOS iClass SE	DESFire EV1/EV2/EV3; Classic; Plus; Ultralight/Ultralight-C
Operating Frequency	125/132 kHz and 13.56 MHz		
Electrical/Mechanical Interface	USB-A, C/Virtual Com/RS-232 Serial/Ethernet		USB-A,C
Protocol/Operating Mode	Keystroke or rf IDEAS SDK	Keystroke or rf IDEAS SDK	Keystroke
Dimensions	4.5" x 2.75" x 0.62" (114.3 mm x 69.8 0mm x 15.6 mm)		
Weight	2.5 ounces (71 g)		
Housing Color	Black		
Indicators	Quad-state LED (off, green, amber, red) and adjustable beeper (off, low, medium, high)		
Power Supply	USB self-powered; some RS-232 and Ethernet models require external power source		
Power Consumption	70 mA typical, 150 mA maximum		
Operating Temperature Range	-22° to 150°F (-30° to 65°C)		
Operating Humidity Range	5% to 95% relative humidity, non-condensing		
Storage Temperature Range	-40° to 185°F (-40° to 85°C)		
Certifications	FCC-United States; CE Mark-Europe; RCM-Australia; IC-Industry Canada; UL Environmental: RoHS, REACH		
Compatible Operating Systems	Windows 10 (32 & 64 bit), 11 (64 bit), MacOS Monterey and above, Linux		
Configuration Utilities	rf IDEAS Configuration Utility, Smart Card Manager, Remote Reader Management Tool		
Proximity Card Types (125/132 kHz)			
Contactless Smartcard Types (13.56MHz)			
Accessories	KT-IP67 - IP67 rated housing kit		

WAVE ID® is a registered trademark of rf IDEAS, Inc. Trademarks not belonging to rf IDEAS are property of their respective companies. ©2024 rf IDEAS, Inc. All rights reserved. Products are subject to change without notice.